



GD 100 SERIES

GATE DRIVE TRANSFORMER



MIL-PRF-27

ELECTRICAL SPECIFICATIONS

- **Operating Temperature:** -55°C to +125°C
- **Storage Temperature:** -60°C to +130°C
- **Insulation Resistance:** 10K MOhms minimum
- **Different electrical values available upon request**

FEATURES

- **Compact**, low profile, ideal for automatic placement
- Built to meet **MIL-PRF-27** specifications
- **Low Thermal Expansion, Transfer Molded Package**
- **Terminations:** Tin-lead
- **Welded Internal Connections**
- **Moisture, Shock and Immersion Resistant**
- **Resistance to Soldering Heat:** 265°C for 10 secs
- **Other termination finishes available**


APPLICATIONS

- Power supplies
- DC/DC converters
- SEPIC converters

ET ref (V- μ S)	DCR max (Ohms)	Inductance ref (mH)
25 to 75	1.1. to 1.4	2.8 to 6.0


MARKINGS: LASER OR INK
ALL DIMENSIONS: INCHES

THRU-HOLE AND GULLWING
PACKAGES ALSO AVAILABLE

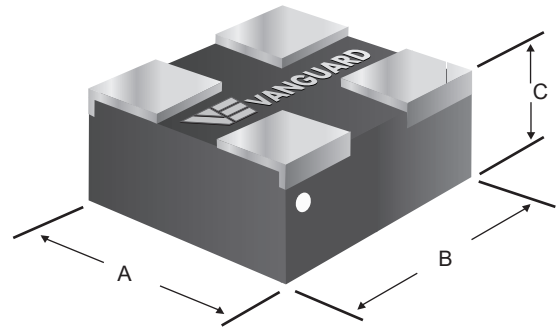

Package	A max.	B max.	C max.
A-1	.260	.260	.230
A-2	.410	.410	.240
A-3	.410	.410	.310

SCHEMATIC



Vanguard P/N	ET ref (V- μ S)	DWV min (V)	DCR max (Ohms)	Inductance ref (mH)	Turns Ratio	Package
GD101	25.0	300	1.3	2.8	1:1	A-1
GD102	37.5	300	1.1	3.6	1:1	A-2
GD103	75.0	300	1.4	6.0	1:1	A-3

Inductance measured at 10 kHz, 0.1 V_{RMS}

CUSTOM DESIGNS & MODIFICATIONS:


Other electrical configurations and performance characteristics are available in various sizes and package types






PACKAGE A1


SIDE VIEW



BOTTOM VIEW






RECOMMENDED MOUNTING PAD CIRCUIT SIDE






IN	MM
0.290	7.37
0.260	6.60
0.230	5.84
0.190	4.83
0.105	2.67
0.085	2.16
0.035	0.88
0.015	0.38

PACKAGE A2



IN	MM
0.440	11.18
0.410	10.41
0.285	7.24
0.255	6.48
0.240	6.09
0.155	3.94
0.135	3.43
0.025	0.64
0.010	0.25

PACKAGE A3



IN	MM
0.440	11.18
0.410	10.41
0.310	7.87
0.300	7.62
0.140	3.56
0.135	3.43
0.025	0.64
0.010	0.25

CUSTOM DESIGNS & MODIFICATIONS:

Other electrical configurations and performance characteristics are available in various sizes and package types

GD100 SERIES

