



SHCI10H SERIES HIGH CURRENT INDUCTOR



ALL PARTS AVAILABLE AS CLASS S OR CLASS B

MIL-STD-981

Inductance Range	DCR max (Ohms)	Current Rating (A)
0.250 uH - 10 mH	0.003 - 12.10	15.3 - 0.23

ALL DIMENSIONS: INCHES

THRU-HOLE & GULL-WING PACKAGES ALSO AVAILABLE

ELECTRICAL SPECIFICATIONS


- **Operating Temperature:** -55°C to +130°C
- **Storage Temperature:** -60°C to +135°C
- **Temperature Rise:** < 30°C
- **Dielectric Withstanding Voltage:** 100 V_{RMS}
- **Different electrical values available upon request**

FEATURES



- **Compact**, low profile, ideal for automatic placement
- **Terminations:** Tin-lead
- **Welded Internal Connections**
- **Moisture, Shock and Immersion Resistant**
- **Magnetically Shielded**
- **Other termination finishes available upon request**
- **Multiple Configurations:** Series, parallel, transformer, dual inductor
- Built to meet **MIL-STD-981** specifications
- **NASA outgassing compliant per ASTM E595** (TML <1%, CVMC <0.1%)

APPLICATIONS


- Filter inductors
- Power supplies
- Ripple suppressors
- DC/DC converters
- Common mode chokes
- SEPIC converters
- Isolation transformers

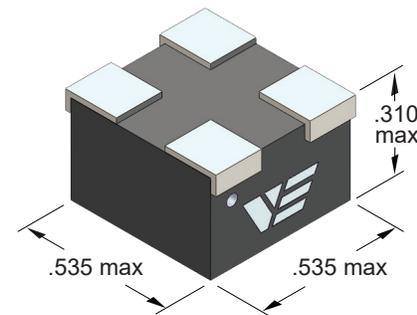


MARKINGS: LASER ETCH OR INK

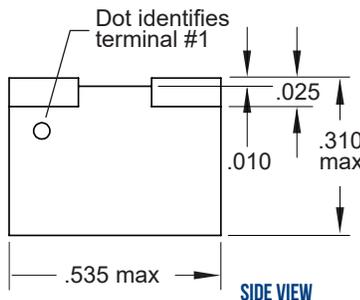


IN	MM
0.565	14.35
0.535	13.59
0.345	8.76
0.310	7.87
0.220	5.59
0.200	5.08
0.025	0.64
0.010	0.25

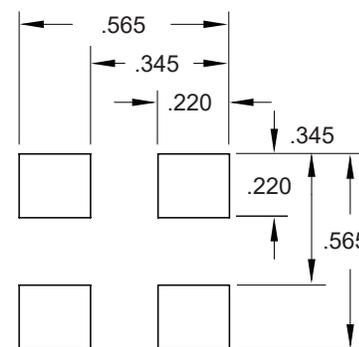

TYPICAL USER CONNECTIONS



SCHEMATIC

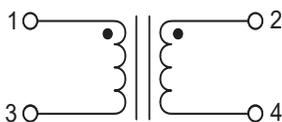

CUSTOM DESIGNS & MODIFICATIONS:

Other electrical configurations and performance characteristics are available in various sizes and package types





DATA TABLE

Vanguard P/N	Series Inductance (uH)	Series DCR max (Ohms)	Series Rated Current (Adc)	Series Inc. Current ΔL 10% (Adc)	Series Inc. Current ΔL 20% (Adc)
SHCI10H-101M	1.0	0.009	7.6	16.6	23.0
SHCI10H-241M	2.4	0.012	7.1	11.0	15.3
SHCI10H-421M	4.2	0.016	6.3	8.3	11.5
SHCI10H-102M	10.0	0.020	5.2	5.5	7.7
SHCI10H-252M	25.0	0.030	4.4	3.7	5.1
SHCI10H-502M	50.0	0.060	3.2	2.4	3.3
SHCI10H-752M	75.0	0.070	2.9	1.9	2.7
SHCI10H-103K	100.0	0.090	2.7	1.7	2.3
SHCI10H-253K	250.0	0.440	1.2	1.1	1.5
SHCI10H-503K	500.0	0.900	0.81	0.77	1.1
SHCI10H-753K	750.0	1.00	0.78	0.41	0.60
SHCI10H-104K	1.0 mH	1.50	0.64	0.35	0.52
SHCI10H-204K	2.0 mH	2.70	0.48	0.25	0.37
SHCI10H-304K	3.0 mH	4.20	0.38	0.20	0.30
SHCI10H-504K	5.0 mH	6.90	0.30	0.16	0.23
SHCI10H-754K	7.5 mH	10.40	0.25	0.13	0.19
SHCI10H-105K	10.0 mH	12.10	0.23	0.11	0.16

Vanguard P/N	Parallel Inductance (uH)	Parallel DCR max (Ohms)	Parallel Rated Current (Adc)	Parallel Inc. Current ΔL 10% (Adc)	Parallel Inc. Current ΔL 20% (Adc)
SHCI10H-101M	0.250	0.003	15.3	33.1	46.0
SHCI10H-241M	0.600	0.003	14.2	22.1	30.7
SHCI10H-421M	1.05	0.004	12.5	16.6	23.0
SHCI10H-102M	2.50	0.005	10.4	11.0	15.3
SHCI10H-252M	6.25	0.008	8.7	7.4	10.2
SHCI10H-502M	12.50	0.015	6.4	4.7	6.6
SHCI10H-752M	18.75	0.020	5.8	3.9	5.4
SHCI10H-103K	25.0	0.025	5.3	3.3	4.6
SHCI10H-253K	62.5	0.110	2.4	2.1	3.0
SHCI10H-503K	125.0	0.225	1.6	1.5	2.1
SHCI10H-753K	187.5	0.250	1.6	0.81	1.2
SHCI10H-104K	250.0	0.375	1.3	0.71	1.0
SHCI10H-204K	500.0	0.675	0.96	0.50	0.73
SHCI10H-304K	750.0	1.05	0.77	0.41	0.60
SHCI10H-504K	1.250 mH	1.75	0.60	0.31	0.46
SHCI10H-754K	1.875 mH	2.60	0.49	0.26	0.38
SHCI10H-105K	2.500 mH	3.00	0.46	0.22	0.33

1/ Inductance measured at 10 kHz, 0.1 V_{RMS}

2/ DCR measured at room temperature

3/ Current Rating is based on a 30°C maximum temperature rise at an ambient temperature of 100°C

4/ Incremental current is the approximate value that will result in a percentage drop of inductance as indicated in the table

5/ Maximum Weight: TBD

6/ Units are series mode tested only, parallel mode values are reference only

CUSTOM DESIGNS & MODIFICATIONS:

Other electrical configurations and performance characteristics are available in various sizes and package types

SHCI10H SERIES





DATA TABLE

VE PART NUMBER STRUCTURE KEY

INDUCTANCE (uH) (mH)

101 = 1.0 uH
503 = 100 uH
105 = 10 mH

EXAMPLE: SHCI10H-101KS-3-T

TOLERANCE (%)

K	± 10
M	± 20

TERMINATION

S	SnPb
---	------

RELIABILITY

2	Group A MIL-STD-981
3	Group A+B MIL-STD-981
4	Group A+B+C MIL-STD-981
7	Other

PACKAGING (Default Bulk)

B	Bulk
T	Tape and Reel

Tape and reel specs
Pcs. / reel maximum: (13") 320
Pitch between parts: 24 mm
Tape width: 24 mm

Parts that don't meet minimum reel requirements will be supplied on cut tape








Tape and Reel not available for Thru-Hole or Gull-Wing Packages

CUSTOM DESIGNS & MODIFICATIONS:

Other electrical configurations and performance characteristics are available in various sizes and package types

SHCI10H SERIES




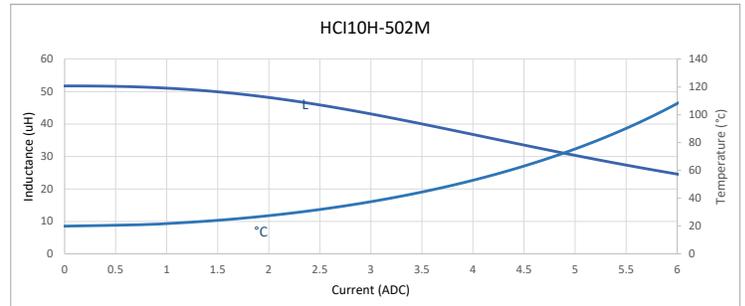
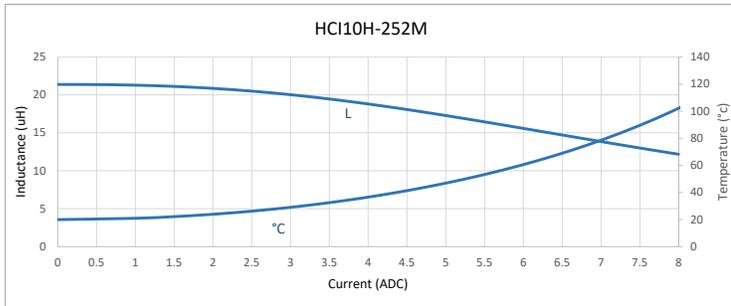
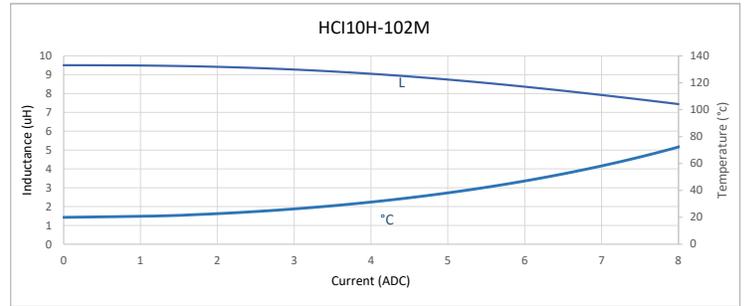
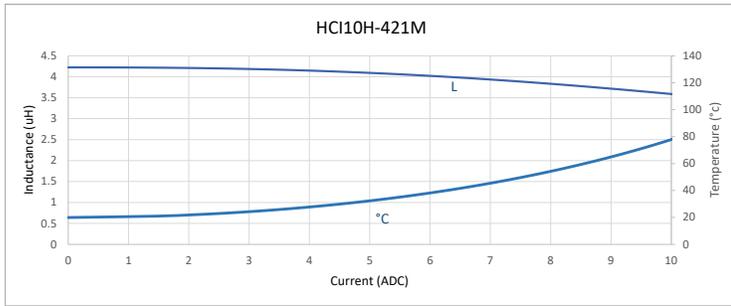
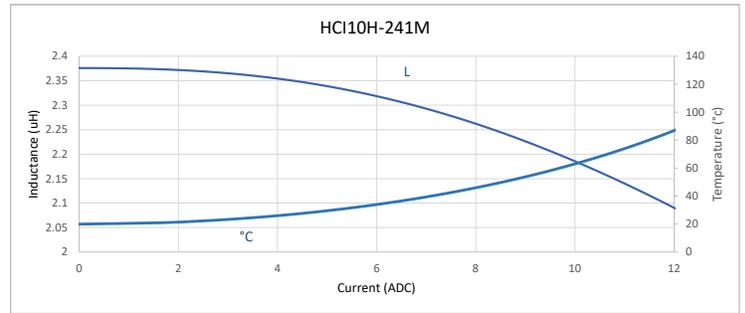
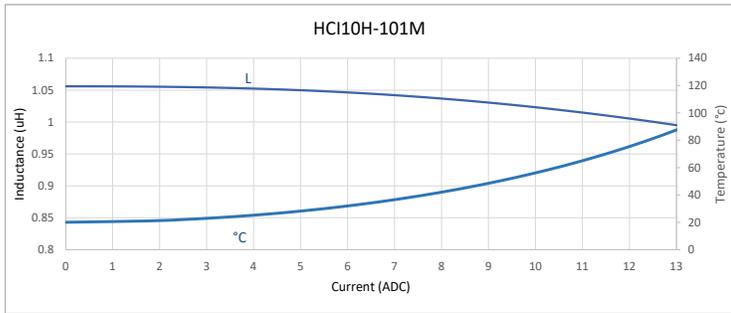
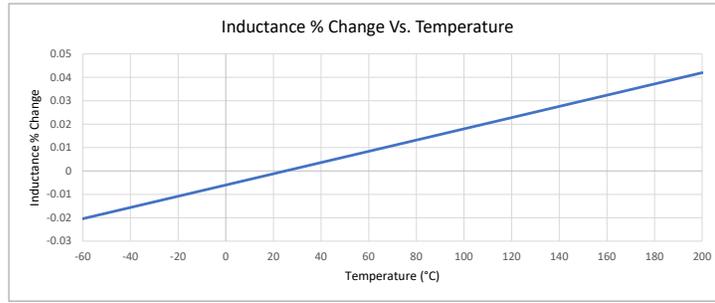


CUSTOM DESIGNS & MODIFICATIONS:

Other electrical configurations and performance characteristics are available in various sizes and package types

SHCI10H SERIES



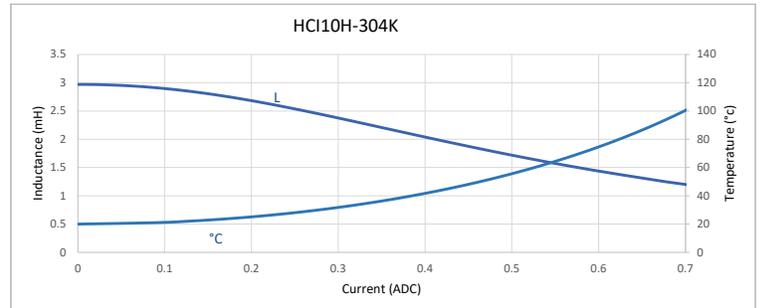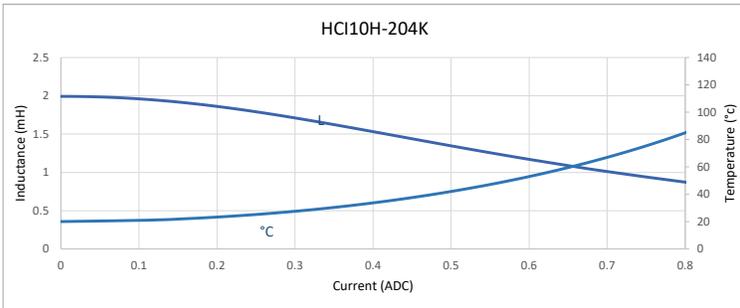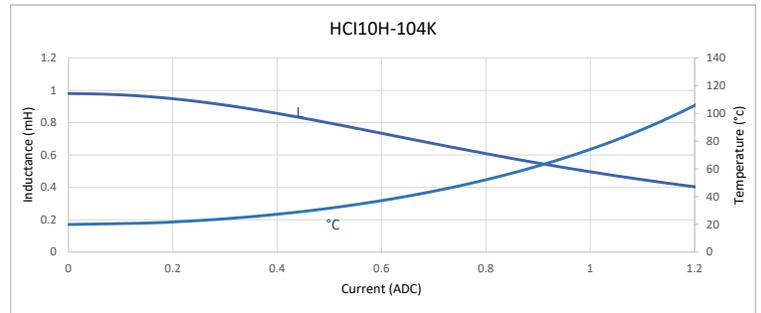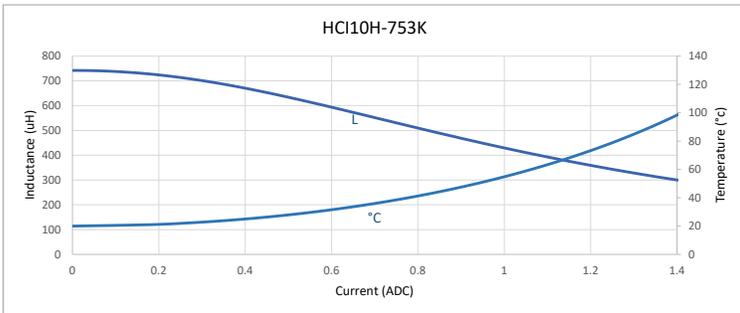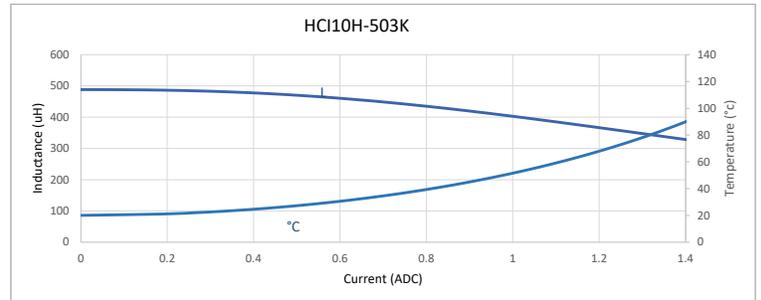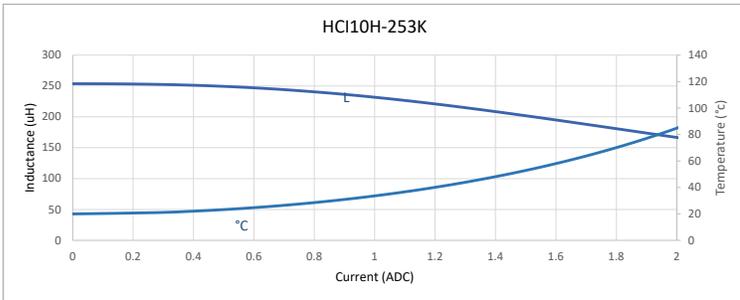
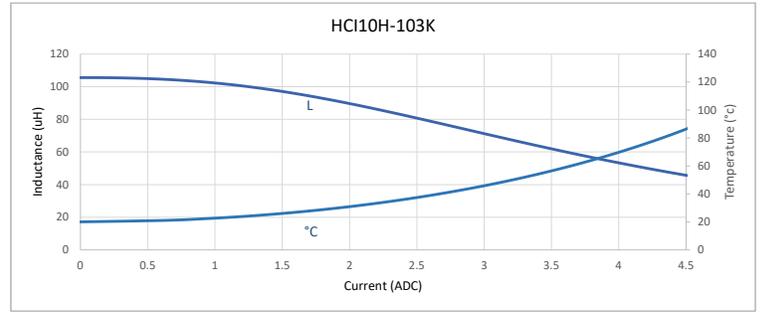
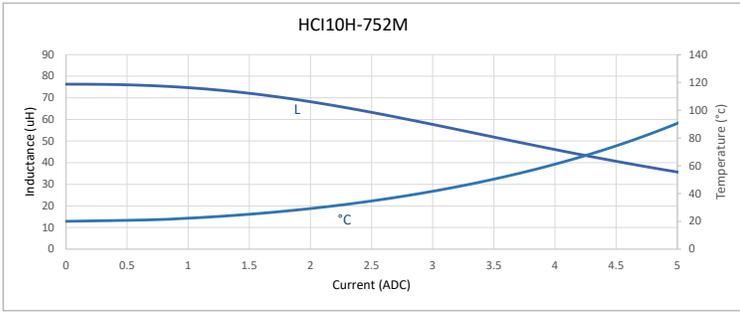


CUSTOM DESIGNS & MODIFICATIONS:

Other electrical configurations and performance characteristics are available in various sizes and package types

SHCI10H SERIES



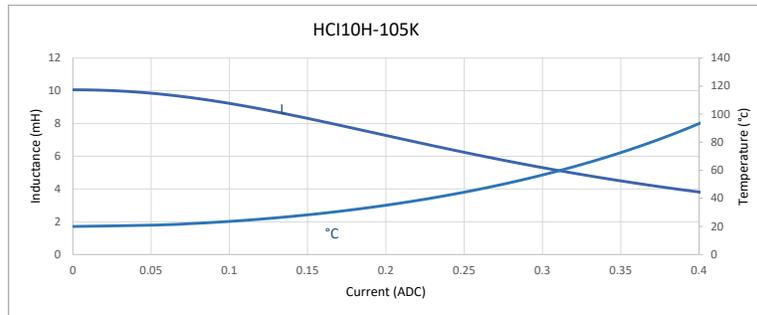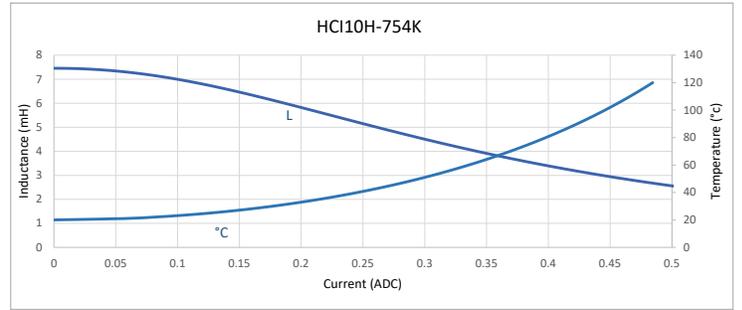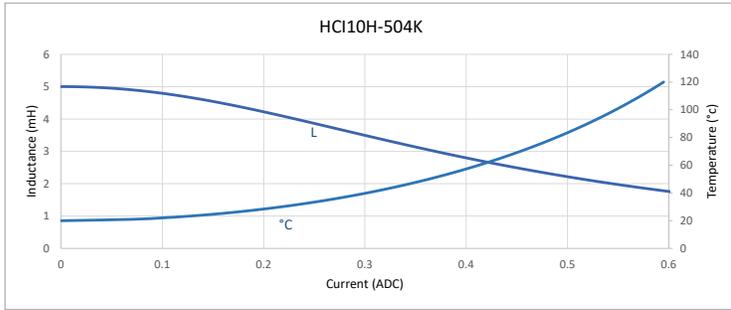

CUSTOM DESIGNS & MODIFICATIONS:

Other electrical configurations and performance characteristics are available in various sizes and package types

SHCI10H SERIES

